




GD-102


GPS DIRECTOR⁺

Quick Start Guide v1.0

Appearance Introduction

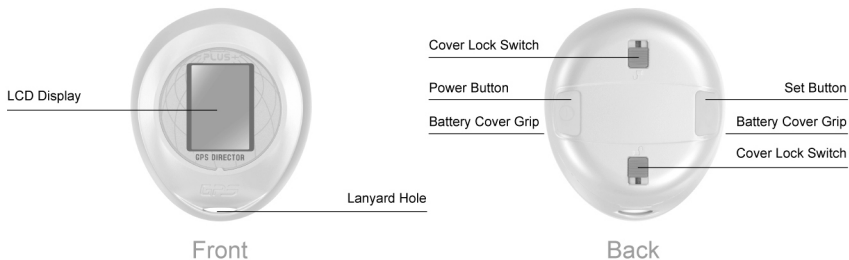

Calibrate E-Compass

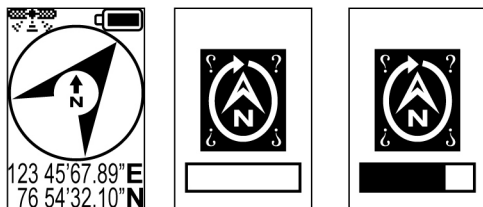

1. Short Press "Select" button to switch to Magnetic North sub-page as left screen in Direction Navigating page after power on.
2. Long press "Select" button to enter the calibrating E-compass function as left screen.
3. Then place the device on the flat and turn it in clockwise for once to twice to complete the calibrating E-compass
4. After completing, the screen will turn to Magnetic North page and show the correct north direction.
(If not, please repeat the calibrating steps again.)

Note: Please calibrate E-compass while avoiding interference with magnetic anomalies.

Button Introduction

Button	Icon	Explanation
Power Button		Power Off Status : Long Press to Power On Main Page: - Short Press to Turn on backlight and switch main function. - Long Press to Turn off the device Setup Page: - Short Press to turn backlight on - Long Press to return the previous page
Set Button		Direction Navigating Screen : - Short Press to switch the target page - In five-target page (    ), Long Press to save GPS location - In  page, Long press to enable/disable data logger function () - In  page, Long press to correct the magnetic north processing Moving Information Screen : - Short Press to enable/disable route calculate function ( ) - Long Press to increase the route into accumulates information, and then cleans the route information. Accumulating Information Screen: - Short Press to enable/disable route calculate function ( ) - Long Press to increase the route into accumulates information, and then cleans the route information. Setup Screen : - Short press to switch the options - Long press to confirm the options.
Power&Set Combo Button		Power Off status : Long press to display the F/W version Main Screen : Long press to enter setup screen

Quick Start

There are three main screen displays and setup screen in GD-102.




Direction Navigating

Target Guide
Route Guide
Magnetic North
Data Logger




Moving Info.

Current Speed
Route Period
Route Mileage
Device Status



Accumulating Info.

AVG. Speed
Max. Speed
Total Mileage/Period
Device Status



Setup

Manual Enter Location
Device setting
Memory Capacity
Date/Default Recovery

Installation of Bicycle Mount

- Install **2** on bike grip and put the suitable spacer **4** or **5** into the ring of **2**.
- Adjust **2** as the fixed angle on the grip and use **3** and **6** to lock the **2** on grip.
- Assemble **1** into **2**'s mounts as the correct direction and then tight it well.
- Put GD-102 device into **1** for the normal operation.

